




ALUMINUM ELECTROLYTIC CAPACITOR

TYPE RM

CASE SIZE 8X11MM, LEAD SPACING 5MM FOR GENERAL USE

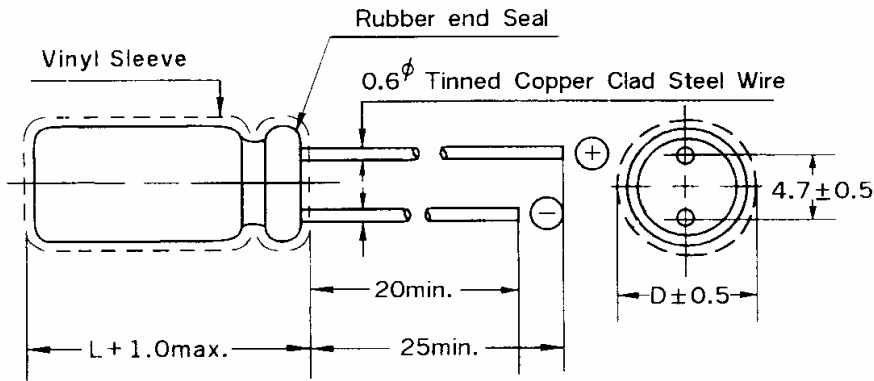

CASE SIZE (DxL mm) AND PERMISSIBLE RIPPLE CURRENT (mA rms, at 85 120 Hz):

W.V.	6.3V		10V		16V		25V		35V		50V		63V		100V		
	μ F	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
10														8x11	70	8x11	80
22														8x11	90	8x11	125
33												8x11	130	8x11	140		
47										8x11	140	8x11	155	8x11	170		
100					8x11	170	8x11	190	8x11	220	8x11	240					
220			8x11	225	8x11	270	8x11	300									
330	8x11	270	8x11	315	8x11	345											
470	8x11	340	8x11	365													