




# ALUMINUM ELECTROLYTIC CAPACITOR

## TYPE SS

### SUBMINIATURE SIZE, 5MM HEIGHT, RADIAL LEADS

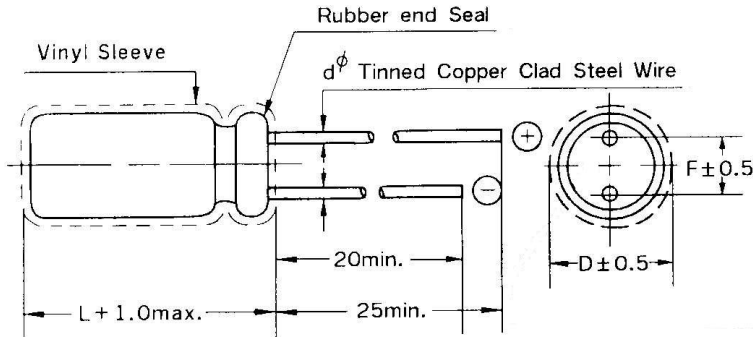

Dimensions in mm

<b>D</b>	4	5	6.3
<b>F</b>	1.5	2.5	3.5
<b>d</b>	0.45	0.5	0.5

### CASE SIZE (DxL mm) AND PERMISSIBLE RIPPLE CURRENT (mA rms, at 85 120 Hz):

W.V.	4V		6.3V		10V		16V		25V		35V		50V		
	$\mu F$	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
0.1														4x5	1.3
0.22														4x5	2.0
0.33														4x5	3.5
0.47														4x5	4.2
1.0														4x5	5.1
2.2														4x5	10
3.3														4x5	14
4.7									4x5	15	4x5	15	5x5	19	
10							4x5	17	5x5	23	5x5	25	6.3x5	29	
22			4x5	23	4x5	23	5x5	32	6.3x5	37	6.3x5	40			
33	4x5	23	5x5	32	5x5	35	6.3x5	42	6.3x5	45	6.3x5	60			
47	4x5	32	5x5	38	5x5	45	6.3x5	50	6.3x5	65					
100	5x5	50	6.3x5	60	6.3x5	72	6.3x5	80							
220	6.3x5	68	6.3x5	75											