




# ALUMINUM ELECTROLYTIC CAPACITOR

## TYPE RL

### LOW LEAKAGE CURRENT, MINIATURE STANDARD SIZE, RADIAL LEADS

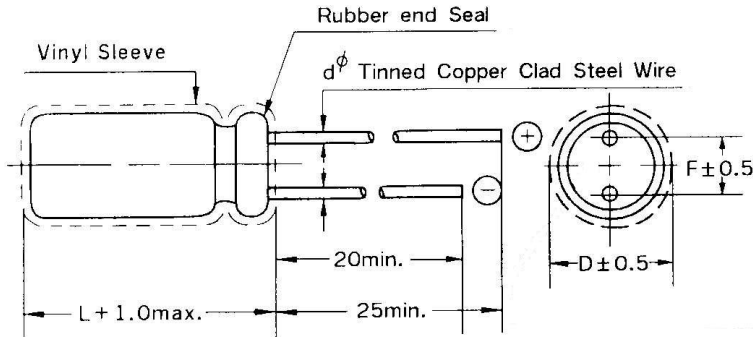

Dimension in mm						
D	5	6.3	8	10	13	16
F	2.0	2.5	3.5	5.0	5.0	7.5
d	0.5	0.5	0.5	0.6	0.6	0.8

### CASE SIZE (DxL mm) AND PERMISSIBLE RIPPLE CURRENT (mA rms, at 85 120 Hz):

W.V.	6.3V		10V		16V		25V		35V		50V		63V	
	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
0.1											5x11	1.5	5x11	3.0
0.22											5x11	3.5	5x11	4.5
0.33											5x11	5.0	5x11	7.5
0.47											5x11	6	5x11	9
1.0											5x11	10	5x11	15
2.2											5x11	15	5x11	20
3.3											5x11	25	5x11	38
4.7											5x11	46	6.3x11	47
10							5x11	50	5x11	58	5x11	67	6.3x11	73
22					5x11	70	5x11	83	6.3x11	97	6.3x11	110	8x11	124
33					5x11	87	6.3x11	132	6.3x11	121	8x11	153	10x12	158
47			5x11	106	6.3x11	114	6.3x11	140	8x11	164	8x11	190	10x16	225
100	5x11	130	6.3x11	163	8x11	216	8x11	220	8x11	250	10x16	331	10x20	347
220	6.3x11	190	8x11	276	10x12	315	10x12	387	10x12	440	13x21	565	13x21	590
330	6.3x11	260	8x11	350	10x12	440	10x16	470	10x16	619	13x26	725	13x26	740
470	8x11	350	10x12	475	10x16	546	10x21	620	10x21	650	16x26	920	16x26	942
1000	10x12	560	10x16	664	13x21	914	13x21	1032	13x21	975	16x32	1235	16x32	1360