




ALUMINUM ELECTROLYTIC CAPACITOR

TYPE RSL

SUBMINIATURE SIZE, LOW LEAKAGE CURRENT, RADIAL LEADS

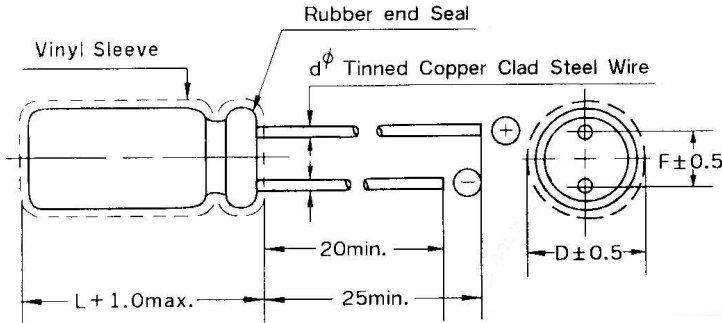

Dimensions in mm

D	4	5	6.3	8
F	1.5	2.0	2.5	3.5
d	0.45	0.5	0.5	0.5

CASE SIZE (DxL mm) AND PERMISSIBLE RIPPLE CURRENT (mA rms, at 85 120 Hz):

W.V.	6.3V		10V		16V		25V		35V		50V		63V	
μ F	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
0.1											4x7	3	4x7	3
0.22											4x7	5	4x7	5
0.33											4x7	6	4x7	6
0.47											4x7	7	4x7	7
1.0											4x7	10	4x7	10
2.2											4x7	15	4x7	16
3.3									4x7	17	4x7	20	5x7	20
4.7							4x7	16	4x7	20	5x7	23	5x7	31
10					4x7	26	4x7	28	5x7	36	6.3x7	45		
22	4x7	33	4x7	36	4x7	39	5x7	47	6.3x7	60				
33	4x7	40	4x7	44	5x7	55	6.3x7	65	8x9	75				
47	5x7	55	5x7	60	6.3x7	75	6.3x7	80	8x9	90				
100	5x7	90	6.3x7	100	6.3x7	110	8x9	125	8x9	140				
220	6.3x7	124	8x9	135	8x9	175								