




ALUMINUM ELECTROLYTIC CAPACITOR

TYPE RP

BI-POLARIZED FOR HORIZONTAL DEFLECTION EQUALIZATION

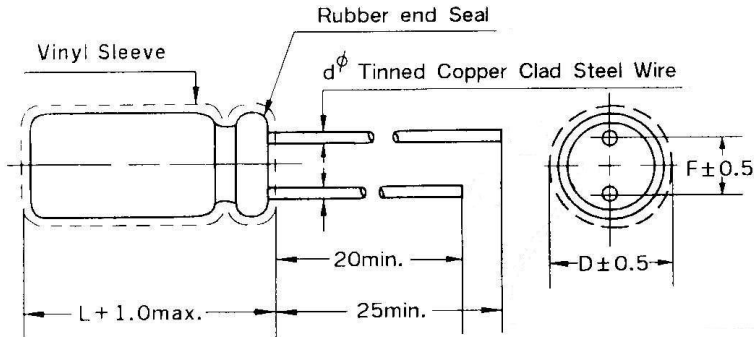

Dimension in mm

D	10	13	16	18	22
F	5.0	5.0	7.5	7.5	10
d	0.6	0.6	0.8	0.8	0.8

CASE SIZE (DxL mm), E.S.R. AND MAX PERMISSIBLE RIPPLE CURRENT (R.C.):

(E.S.R.: Ohm, at 120Hz 25 R.C.: A p-p, at 15.75KHz 85)

W.V.	25V			35V			50V		
μF	DxL	ESR	R.C.	DxL	ESR	R.C.	DxL	ESR	R.C.
2.2	10x21	30.14	2.8	13x26	30.14	3.5	13x26	30.14	3.5
3.3	13x26	20.10	4.5	13x26	20.10	4.8	16x25	20.10	4.8
4.7	13x26	14.11	5.5	13x26	14.11	6.5	16x32	14.11	6.5
6.8	16x32	9.75	7.5	16x26	9.75	8.0	16x35	9.75	8.0
8.2	16x32	8.09	8.5	16x32	8.09	9.5	18x36	8.09	9.5
10	18x32	6.63	10.0	18x32	6.63	10.5	18x36	6.63	10.5
12	18x32	5.53	11.5	18x32	5.53	12.0	22x41	5.53	12.0
18	18x32	3.68	13.0	18x32	3.68	13.0			
22	18x32	2.83	14.5	18x32	2.83	14.5			