




ALUMINUM ELECTROLYTIC CAPACITOR

TYPE V

SURFACE MOUNT TYPE, 85°C 2000 HOURS

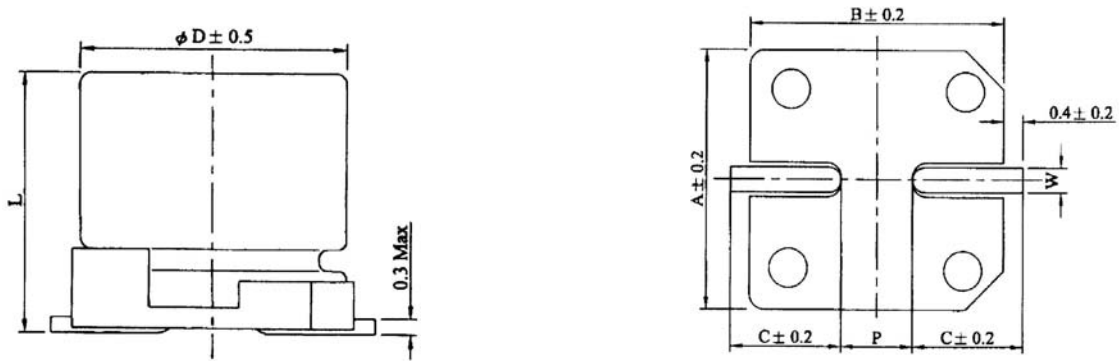

Unit: mm

ϕD	L	A	B	C	W	P ± 0.2
8	6.5 ± 0.3	8.4	8.4	3.0	0.5 TO 0.8	2.3
8	10 ± 0.5	8.4	8.4	3.0	0.7 TO 1.1	3.1
10	10 ± 0.5	10.4	10.4	3.3	0.7 TO 1.1	4.7

CASE SIZE (DxL mm) AND PERMISSIBLE RIPPLE CURRENT (mA rms, at 85°C 120 Hz):

W.V.	6.3V		10V		16V		25V		35V		50V		63V		100V	
	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
10													8X6.5	75	8x10	94
22											8x6.5	155	8x10	139	10x10	189
33									8x6.5	155	8x6.5	155	8x10	139	10x10	189
47							8x6.5	155	8x6.5	155	8x10	252	10x10	226		
68													10x10	226		
100			8x6.5	155	8x6.5	155	8x6.5	155	8x10	252	10x10	458				
220	8x6.5	155	8x6.5	155	8x10	252	8x10	252	10x10	458						
330	8x6.5	155	8x10	252	8x10	252	10x10	458								
470	8x10	252	10x10	458	10x10	458										
1000	10x10	458	10X10	458												