




ALUMINUM ELECTROLYTIC CAPACITOR

TYPE V2

SURFACE MOUNT TYPE, 85°C 2000 HOURS 5.5MM HEIGHT

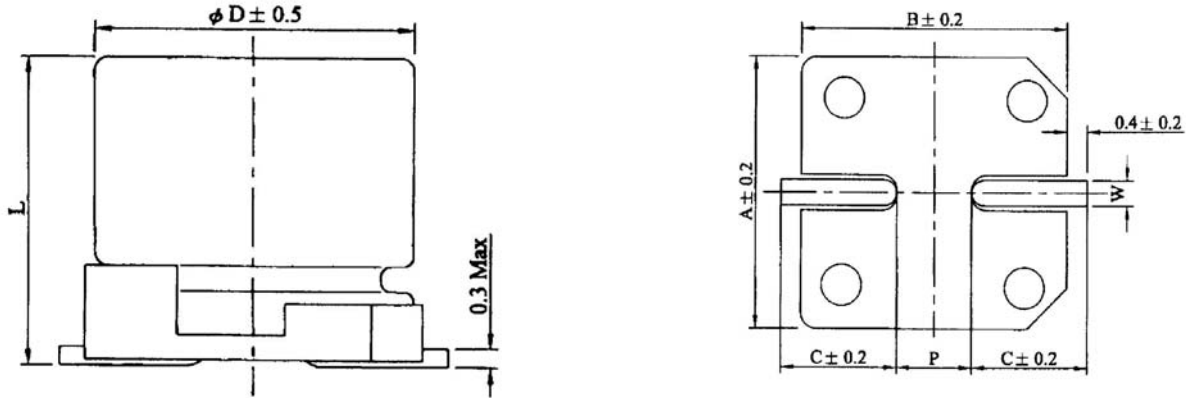

Unit: mm

D ϕ	L	A	B	C	W	P ± 0.2
4.0	5.3 \pm 0.2	4.3	4.3	2.0	0.5 to 0.8	1.0
5.0	5.3 \pm 0.2	5.3	5.3	2.3	0.5 to 0.8	1.5
6.3	5.3 \pm 0.2	6.6	6.6	2.7	0.5 to 0.8	2.0

CASE SIZE (DxL mm) AND PERMISSIBLE RIPPLE CURRENT (mA rms, at 85°C 120 Hz):

W.V.	4V		6.3V		10V		16V		25V		35V		50V	
	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
0.1													4x5.3	3
0.22													4x5.3	5
0.33													4x5.3	6
0.47													4x5.3	7
1.0													4x5.3	10
2.2													4x5.3	15
3.3													4x5.3	19
4.7									4x5.3	19	4x5.3	20	4x5.3	26
10					4x5.3	23	4x5.3	26	5x5.3	32	5x5.3	34	6.3x5.3	44
22			4x5.3	31	5x5.3	39	5x5.3	44	6.3x5.3	55	6.3x5.3	59		
33	4x5.3	31	5x5.3	44	5x5.3	48	6.3x5.3	63	6.3x5.3	67				
47	4x5.3	37	5x5.3	52	6.3x5.3	67	6.3x5.3	75						
100	5x5.3	63	6.3x5.3	89	6.3x5.3	98	6.3x5.3	103						
220	6.3x5.3	110	6.3x5.3	120										