




ALUMINUM ELECTROLYTIC CAPACITOR

TYPE VH

SURFACE MOUNT TYPE, 105°C 1000 HOURS, LOW IMPEDANCE

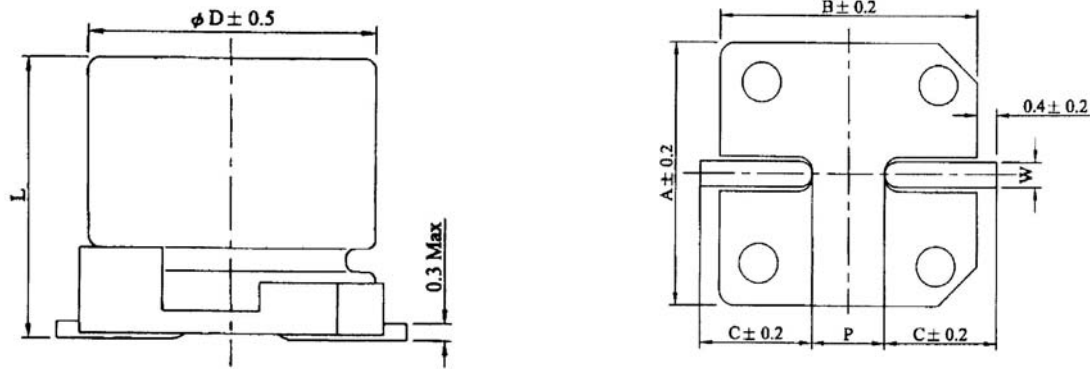

Unit: mm

D φ	L	A	B	C	W	P ± 0.2
8.0	10 ± 0.5	8.4	8.4	3.0	0.7 to 1.1	3.1
10	10 ± 0.5	10.4	10.4	3.3	0.7 to 1.1	4.7

CASE SIZE (DxL mm), PERMISSIBLE RIPPLE CURRENT (mA rms, at 105°C 100K Hz) AND IMPEDANCE (Ohm at 100K Hz, 20°C):

W.V.	6.3V			10V			16V			25V			35V		
	DxL	Imp.	R.C.	DxL	Imp.	R.C.	DxL	Imp.	R.C.	DxL	Imp.	R.C.	DxL	Imp.	R.C.
47													8x10	0.45	369
100										8x10	0.45	369	10x10	0.25	553
150													8x10	0.45	369
220				8x10	0.45	369				8x10	0.45	369	10x10	0.25	553
										10x10	0.25	553			
330	8x10	0.45	369				8x10	0.45	369	10x10	0.25	553			
							10x10	0.25	553						
470	8x10	0.45	369	8x10	0.45	369	10x10	0.25	553						
				10x10	0.25	553									
820				10x10	0.25	553									
1000	10x10	0.25	553												