




ALUMINUM ELECTROLYTIC CAPACITOR

TYPE VZ

SURFACE MOUNT TYPE, 105°C 1000 HOURS, LOW IMPEDANCE

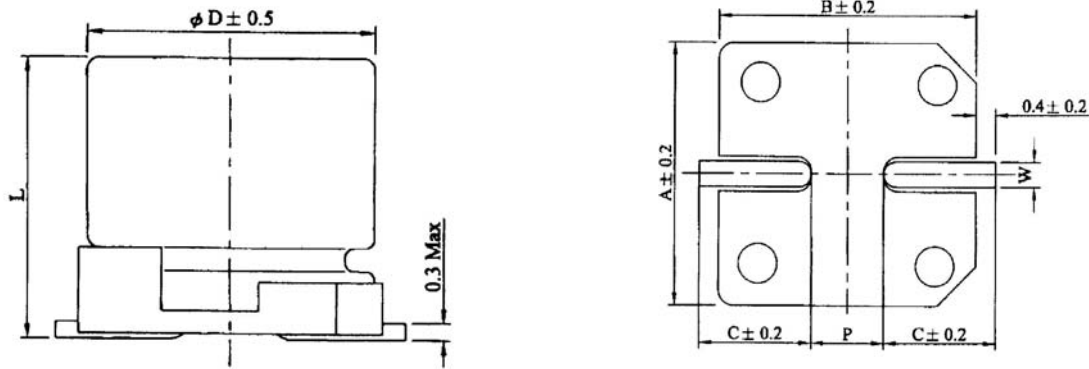

Unit: mm

D ϕ	L	A	B	C	W	P ± 0.2
8.0	10 ± 0.5	8.4	8.4	3.0	0.7 to 1.1	3.1
10	10 ± 0.5	10.4	10.4	3.3	0.7 to 1.1	4.7

CASE SIZE (DxL mm), PERMISSIBLE RIPPLE CURRENT (mA rms, at 105°C 100K Hz) AND IMPEDANCE (Ohm at 100K Hz, 20°C):

W.V.	6.3V			10V			16V			25V			35V		
	DxL	Imp.	R.C.	DxL	Imp.	R.C.	DxL	Imp.	R.C.	DxL	Imp.	R.C.	DxL	Imp.	R.C.
4.7										4X5.3	3.20	65	4X5.3	3.20	65
10				4X5.3	3.20	65	4X5.3	3.20	65	5x5.3	1.50	110	5X5.3	1.50	110
22	4X5.3	3.20	65	5x5.3	1.50	110	5x5.3	1.50	110	6.3X5.3	0.85	170	6.3X5.3	0.85	170
33	5x5.3	1.50	110	5x5.3	1.50	110	6.3X5.3	0.85	170	6.3X5.3	0.85	170	6.3X5.3	0.85	170
47	5x5.3	1.50	110	6.3X5.3	0.85	170	6.3X5.3	0.85	170	6.3X5.3	0.85	170	6.3X5.3	0.50	255
100	6.3X5.3	0.85	170	6.3X5.3	0.85	170	6.3X5.3	0.85	170	6.3X7.7	0.50	255			
150							6.3X7.7	0.50	255						
220	6.3X7.7	0.50	255												