




ALUMINUM ELECTROLYTIC CAPACITOR

TYPE LST-- LARGE CAPACITANCE, WITH SNAP-IN TERMINAL FOR 105°C USE

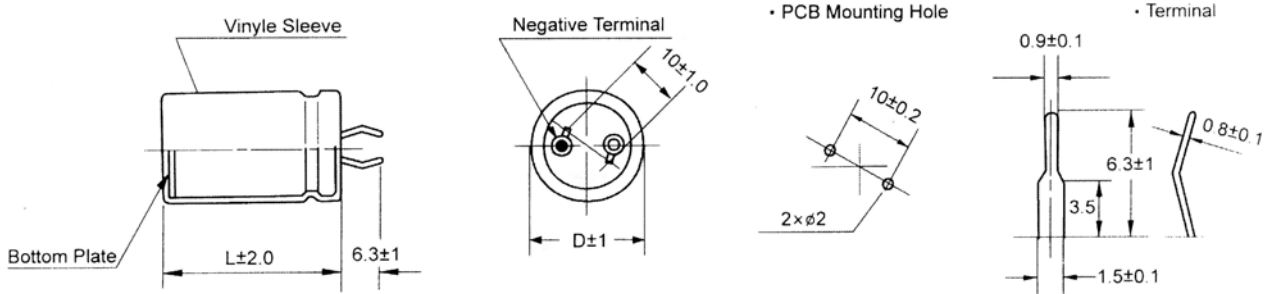

CASE SIZE (DxL mm), PERMISSIBLE RIPPLE CURRENT (A rms, at 120 Hz, 105°C) & MAX E.S.R. (Ω at 120 Hz, 20°C):

W.V. μF	16V			25V			35V			50V		
	DxL	R.C.	E.S.R.	DxL	R.C.	E.S.R.	DxL	R.C.	E.S.R.	DxL	R.C.	E.S.R.
1000							22x25	0.86	0.497	22x25	0.91	0.414
1500							22x25	1.01	0.332	22x30	1.14	0.276
2200				22x25	1.17	0.264	22x35	1.34	0.226	22x40	1.49	0.188
3300	22x25	1.23	0.226	22x35	1.54	0.175	22x45	1.70	0.151	25x45	1.81	0.126
4700	22x30	1.47	0.159	22x40	1.79	0.123	25x45	1.88	0.106	25x50	2.04	0.088
6800	22x40	1.84	0.110	25x45	2.11	0.085	25x50	2.14	0.073			
8200	22x45	2.02	0.091	25x45	2.18	0.071						
10000	25x45	2.14	0.075	25x50	2.35	0.058						
12000	25x50	2.32	0.062									
15000	25x50	2.40	0.050									